

Milwaukee Valve Cast Steel Gate, Globe, and Check Valves

API 600 GATE VALVES

- Flexible split wedge for improved seating
- 2-bolt adjustable stem packing arrangement for longer packing life
- Grounded finish on stem for improved packing seal
- Outside Screw & Yoke rising stem design
- Seal-welded seat rings for stable shut-off
- Handwheel, bevel gear operator, or electric actuation available
- Size range 2" - 24" (CL 150/300), 2" - 12" (CL 600). Contact factory for additional sizes.

API 623 GLOBE VALVES

- Rotating seat disc for improved seating
- Outside Screw & Yoke rising stem design
- Integral seat with body and disc overlay
- 2-bolt adjustable stem packing arrangement for longer packing life
- Size range 2" - 8" (CL 150/300), 2" - 6" (CL 600). Contact factory for additional sizes.

API 594 SWING CHECK VALVES

- Horizontal full port design with bolted cover
- Pinned rotating disc for improved sealing
- Seal-welded seat rings for stable shut-off
- Size range 2" - 12" (CL 150/300/600). Contact factory for additional sizes.



SPECIFICATIONS & STANDARDS

Design	API (as noted), ASME B16.34
Flange Connections	ASME B16.5
Butt-Weld Connections	ASME B16.25
End-to-End Dimensions	ASME B16.10
Testing and Inspection	API 598
Pressure & Temperature	ASME B16.34
By-Passes & Drains	MSS SP-45
Materials	ASTM standards

Notes:

1. Heat codes and MTR's provided for traceability of each valve.
2. Contact factory for optional trim materials or larger sizes.
3. Customer must specify pipe schedule for butt-weld ends.
4. Operating temperature range is -20 to 800°F per ASME B16.34.

HOW TO ORDER MILWAUKEE VALVE CAST STEEL

15 5 0 CB 2 HW M BP

Pressure Class:
15 = Class 150
30 = Class 300
60 = Class 600

Type:
5 = Gate
6 = Globe
7 = Check

Pipe Ends:
0 = Flanged
2 = Butt-Weld (Std)
3 = Butt-Weld (Extra Heavy)

Body Material:
CB = A216 WCB

Trim Material:
2 = API 8 (std)
(Contact factory for all other trim options)

Operator:
HW = Handwheel
GB = Bevel Gear Operator
SC = Swing Check (No Operator)
(Contact factory for Actuation)


Options:
(blank) = None
BP = By-Pass
DT = Drilled & Tapped

Revision:
M = Designated Manufacturer

The information presented on this sheet is correct at time of publication. Milwaukee/Hammond Valve reserves the right to change design and/or materials without notice. For our Installation, Operation and Maintenance Manual and the most current product information go to www.milwaukeevalve.com or www.hammondvalve.com. ⚠ State of California Prop 65 **WARNING:** Cancer and Reproductive Harm. For more information visit www.p65warnings.ca.gov.



1550CB2M FLANGED ENDS 1552CB2M BUTT-WELD ENDS GATE CLASS 150 10"-18"

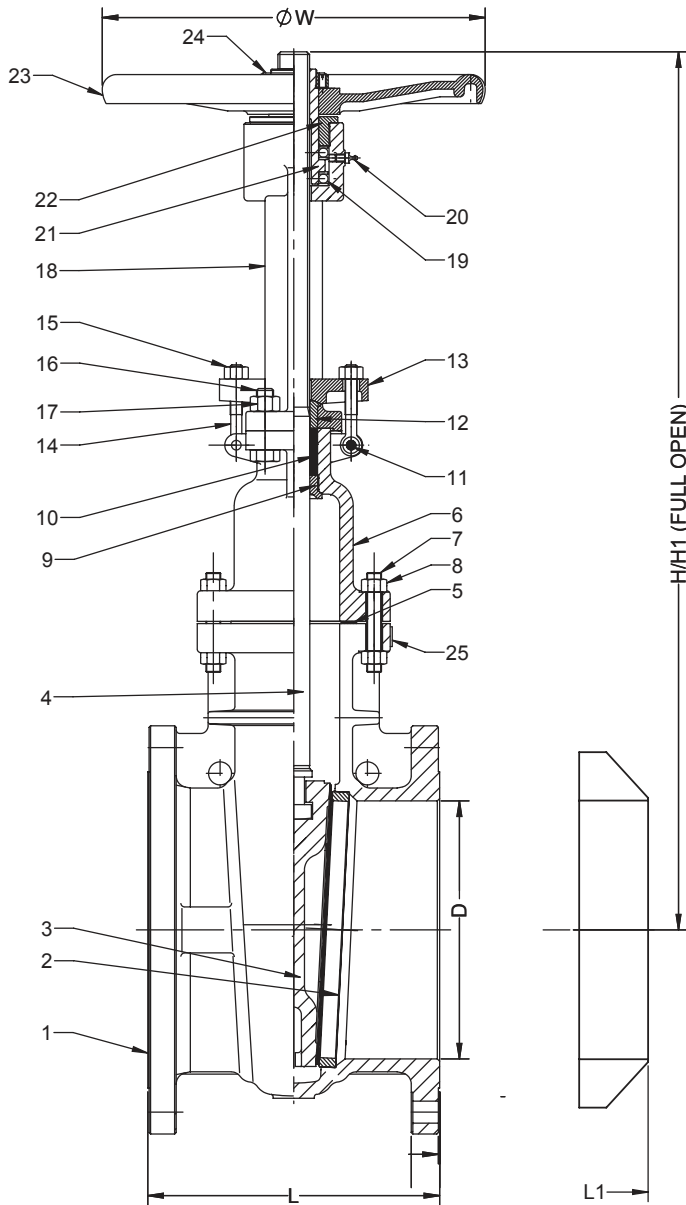

SPECIFICATIONS		
DESIGN: API 600 12 Edition, ASME B16.34		
PRESSURE-TEMP RATINGS: ASME B16.34		
CONNECTIONS: ASME B16.5, B16.25		
FACE TO FACE: ASME B16.10		
TEST & INSPECTION: API 598 RP 591		
MATERIALS: ASTM		
MATERIAL LIST		
ITEM	PART NAME	MATERIAL
1	BODY	A216 WCB
2	SEAT RING	A105+STL6
3	WEDGE	A216 WCB+13Cr
4	STEM	A182 F6a
5	GASKET	GRAPHITE+SS CORE
6	BONNET	A216 WCB
7	STUD BODY/BONNET	A193 B7
8	NUT BODY/BONNET	A194 2H
9	BACKSEAT BUSHING	A276 TYPE 420
10	PACKING	GRAPHITE
11	GLAND EYEBOLT PIN	A29 1035
12	GLAND	A276 410
13	GLAND FLANGE	A216 WCB
14	GLAND EYEBOLT	A193 B7
15	GLAND EYEBOLT NUT	A194 2H
16	YOKE BOLT	A193 B7
17	YOKE NUT	A194 2H
18	YOKE	A216 WCB
19	BEARING	BEARING STEEL
20	GREASE FITTING	A36
21	YOKE BUSHING NUT	A493 D2
22	YOKE BUSHING	A29 1035
23	HANDWHEEL	A536
24	HANDWHEEL NUT	A29 1035
25	NAMEPLATE	A240 321

SIZE		L FACE TO FACE	L1 BUTT WELD	D DIA	H CLOSED	H1 FULL OPEN	W HAND WHEEL	C _v
10"	IN	12.99	17.99	10.00	37.01	47.68	17.72	8940
	MM	330	457	254	940	1211	450	
12"	IN	14.02	19.76	12.01	42.87	55.55	19.69	13350
	MM	356	502	305	1089	1411	500	
14"	IN	15.00	22.52	13.27	46.77	60.75	22.05	16275
	MM	381	572	337	1188	1543	560	
16"	IN	15.98	24.02	15.24	52.87	68.90	25.20	21560
	MM	406	610	387	1343	1750	640	
18"	IN	17.01	25.98	17.24	58.07	76.10	28.35	28720
	MM	432	660	438	1475	1933	720	

The information presented on this sheet is correct at time of publication. Milwaukee/Hammond Valve reserves the right to change design and/or materials without notice. For our Installation, Operation and Maintenance Manual and the most current product information go to www.milwaukeevalve.com or www.hammondvalve.com. ⚠ State of California Prop 65 **WARNING:** Cancer and Reproductive Harm. For more information visit www.p65warnings.ca.gov.

