



8201-15/8211-15* 1/2"-1"

Brass Ball Valve
Two Piece
Standard Port
400 WOG
Threaded or Solder Ends
Blow-Out Proof Stem


*Not intended for use in potable water.

MATERIALS LIST

ITEM	PART	MATERIALS	ASTM SPEC.
1	FOLLOWER	BRASS	ASTM B124, C37700
2	STEM PACKING	TFE	
3	STEM PACKING	BRASS	ASTM B124, C37700
4	SEAT	TFE	
5	BODY	FORGED BRASS	ASTM B283, C37770
6	BALL	BRASS, CP	ASTM B283, C37770
7	END PIECE	FORGED BRASS	ASTM B283, C37770
8	THRUST WASHER	TFE	ASTM B283, C37770

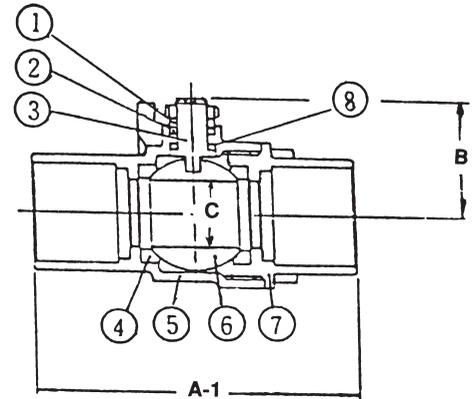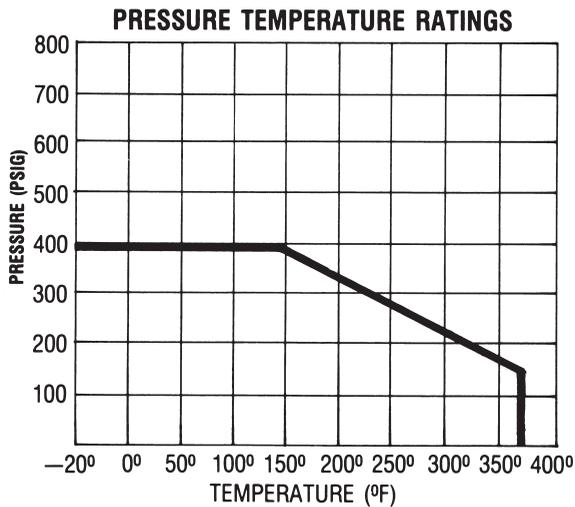

8211-15 Solder

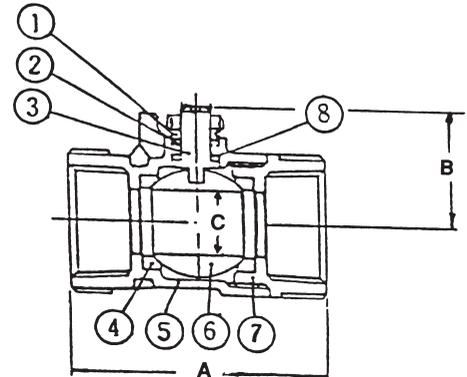

8201-15 Threaded

DIMENSIONS

	UNITS	A	A-1	B	C	C _V	TORQUE IN LBS.
1/2	INCHES	1.84	2.05	0.94	0.41	6.8	20
	mm	47	52	24	10		
3/4	INCHES	2.16	2.81	1.06	0.59	14	30
	mm	55	71	27	15		
1	INCHES	2.63	3.25	1.41	0.78	28	50
	mm	67	83	36	20		

The information presented on this sheet is correct at time of publication. Hammond Valve reserves the right to change design and/or materials without notice. For our Installation, Operation and Maintenance Manual and the most current product information go to www.hammondvalve.com. Hammond Valve is a registered trademark of Milwaukee Valve.

⚠ State of California Prop 65 **WARNING:** Cancer and Reproductive Harm. For more information visit www.p65warnings.ca.gov.