


# BRONZE SPRING CHECK VALVE

# 943 & 947

250 WOG

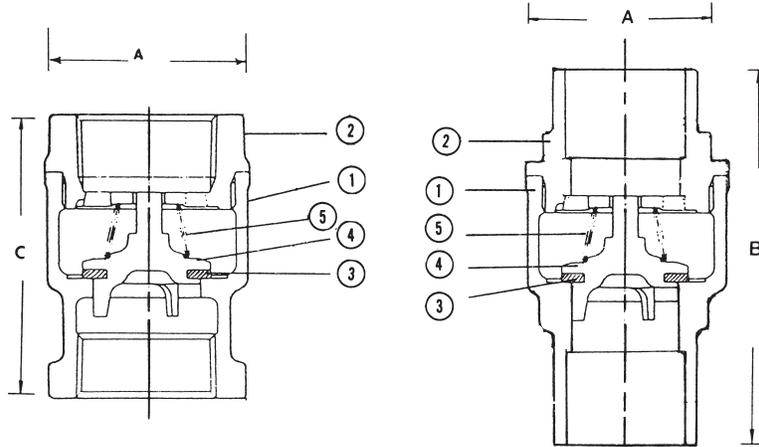

**943 Threaded**

**947 Solder**

DIMENSIONS (INCHES)				Approx. Weight 943	Approx. Weight 947	C <sub>v</sub>
SIZE	A	B	C			
3/8	1.25	2.06	1.97	0.43	0.43	2.5
1/2	1.25	2.41	2.09	0.43	0.43	4.1
3/4	1.50	2.81	2.31	0.66	0.66	7.6
1	1.91	3.53	2.66	1.02	1.02	13
1 1/4	2.16	3.88	3.09	1.47	1.47	23
1 1/2	2.59	4.22	3.31	2.20	2.20	31
2	3.13	5.09	3.78	3.30	3.30	54

MATERIAL SPECIFICATION			
1	Body	Cast Bronze	ASTM B584, C84400
2	Tail Piece	Cast Bronze	ASTM B584, C84400
3	Disc	Buna	
4	Disc Holder	Cast Bronze	ASTM B584, C84400
5	Spring	Bronze	ASTM B103, C52100

### RATING

- 250 PSI NON-SHOCK COLD WATER, OIL OR GAS

### FEATURES

- BRONZE BODY
- THREADED OR SOLDER ENDS
- BRONZE SPRING
- BUNA DISC RING
- BRONZE DISC HOLDER
- 100% FACTORY TESTED
- SILENT CLOSING (minimizes water hammer)
- INTERNATIONAL

**Do not use for reciprocating air compressor service.**

**Note:** Check Valves may be installed in both the horizontal and vertical lines with upward flow or in any intermediate position.

The information presented on this sheet is correct at time of publication. Hammond Valve reserves the right to change design and/or materials without notice. For our Installation, Operation and Maintenance Manual and the most current product information go to [www.hammondvalve.com](http://www.hammondvalve.com). Hammond Valve is a registered trademark of Milwaukee Valve.

⚠ State of California Prop 65 **WARNING:** Cancer and Reproductive Harm. For more information visit [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).