
Horizontal Swing • Flanged Ends

Bolted Cover

Conforms to: MSS SP-71

Flange shape and drilling to specification ASME B 16.1 (125 lb).

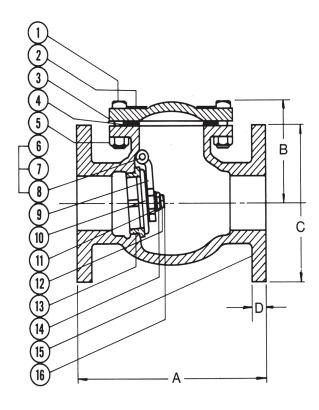

Note 1: On pump discharge, the preferred check valve is either an in-line spring loaded valve or a swing design with lever and weight. Install these valves as far as possible from the pump and elbows with a minimum distance of 5 times the pipe diameter.

Note 2: These iron body check valves may be installed in horizontal and vertical lines with upward flow or in intermediate position.

MATERIAL LIST								
No.	PART	MATERIAL	SPECIFICATION					
1	Bolt	Steel						
2	Name Plate	Aluminum						
3	Cover	Cast Iron	ASTM A126, Class B					
4	Cover Gasket	Graphite						
5	Nut	Steel						
6	Side Plug	Brass	ASTM B16					
7	Side Plug Gasket	PTFE						
8	Hanger Pin	SS 304	ASTM B16					
9	Hanger	Ductile Iron	ASTM A536					
10¹	Disc	Cast Iron	ASTM A126, Class B					
11	Washer	Steel						
12	Cotter Pin	Zinc Plated Steel						
13	Seat Ring	Bronze	ASTM B62					
14	Disc Nut	Steel	ASTM A307					
15	Body	Cast Iron	ASTM A126, Class B					
16	Stud Bolt	Brass	ASTM B16					

¹ Valve Disc-Cast Iron with bronze disc face rings

DIMENSIONS - INCHES/MILLIMETERS								
Units	Size	Α	В	С	D	Cv		
Inches mm	2	8.00 203	4.56 116	6.00 152	0.63 16	143		
Inches mm	2 1/2	8.50 216	5.38 137	7.00 178	0.69 17	242		
Inches mm	3	9.50 241	5.56 141	7.50 191	0.75 19	366		
Inches mm	4	11.50 292	6.69 170	9.00 229	0.94 24	572		
Inches mm	5	13.00 330	7.75 197	10.00 254	0.94 24	894		
Inches mm	6	14.00 356	9.50 241	11.00 279	1.00 25	1287		
Inches mm	8	19.50 495	10.38 264	13.50 343	1.13 29	2288		
Inches mm	10	24.50 622	12.00 305	16.00 406	1.19 30	3574		
Inches mm	12	27.50 699	13.50 343	19.00 483	1.25 32	5147		

Suffix M - Signifies "MILVACO" Series International Valves.

The information presented on this sheet is correct at time of publication. Hammond Valve reserves the right to change design and/or materials without notice. For our Installation, Operation and Maintenance Manual and the most current product information go to www.hammondvalve.com. Hammond Valve is a registered trademark of Milwaukee Valve.





[†] Non-Shock